

# Elite 350™ CAT5E 350 MHz LAN 4 \*UTP Stranded Cable

Construction:

\*Unshielded Twisted Pair

Item #	Flame Rating	Jacket	Color	Wt. Lb. / Wt.Kg	O.D.	Packaging Put-Up
TPM2404N35xx	CM	PVC	xx	28 / 12.7	5.50 ± .2mm	1000' Reel in Box

xx= (BU) Blue, (BK) Black, (GY) Gray, (WH) White, (YE) Yellow, (RE) Red, (GR) Green, OR (Orange), VI (Violet), PI (Pink)

**Industry Standards:**

UL/cUL Listed CMR, CMP  
 UL, ETL Verified to Standards  
 ISO/IEC-11801  
 NEMA WC 63.1

**Material Descriptions:**

Conductor: 24AWG bare stranded copper  
 Insulation: HDPE

Ripcord: Under jacket


Jacket: PVC

**Applications:**

Gigabit Ethernet  
 ATM 622 or higher  
 Broadband video  
 (77 channels, 350MHz)

**Product Electrical Characteristics:**

Impedance: 100±15ohms  
 Mutual Capacitance (max. nf/1000ft): 56  
 DC Resistance (max. Ohms/1000ft): 28.6  
 DC Resistance Unbalance of a pair: 5% max  
 Propagation Delay Skew: 536 nS/100M  
 Capacitance Unbalance (Pair to Ground): 3300pf/Km Max  
 Normal Velocity of Propagation: 66%

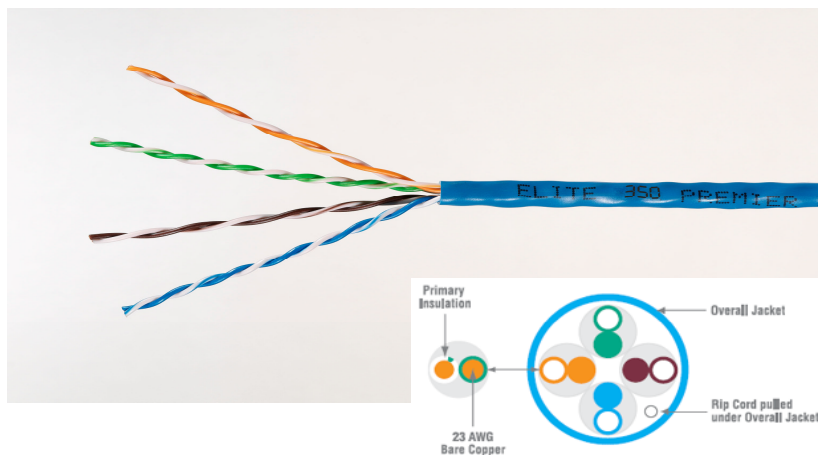

Frequency MHz	ATT Max	NEXT Min	ACR Min	PS.NEXT Min	PS.ACR Min	ELFEXT Min	PS.ELFEXT Min	R.L. Min
1	2.4	68.3	65.9	66.3	63.9	63.8	60.8	20
4	4.9	59.3	54.4	57.3	52.4	51.7	48.7	23
8	6.9	54.8	47.9	52.8	45.9	45.7	42.7	24.5
10	7.8	53.3	45.5	51.3	43.5	43.8	40.8	25
16	9.8	50.3	40.5	48.3	38.5	39.7	36.7	25
20	11.2	48.8	37.6	46.8	35.6	37.8	34.8	25
25	12.5	47.3	34.8	45.3	32.8	35.8	32.8	24.2
31.25	14	45.9	31.9	43.9	29.9	33.9	30.9	23.3
62.5	20.4	41.4	21	39.4	19	27.8	24.8	20.7
100	26.4	38.3	11.9	36.3	9.9	23.8	20.8	19
155	33.7	35.5	1.8	33.5	0	20	17	17.4
200	38.9	33.8	NA	31.8	NA	17.7	14.7	16.4
250	43.2	32.6	NA	30.6	NA	16.2	13.2	15.7
300	49.2	31.2	NA	29.2	NA	14.2	11.2	14.9
350	53.9	30.1	NA	28.1	NA	12.9	9.9	14.3

